TESLA
TT35X81-12410A

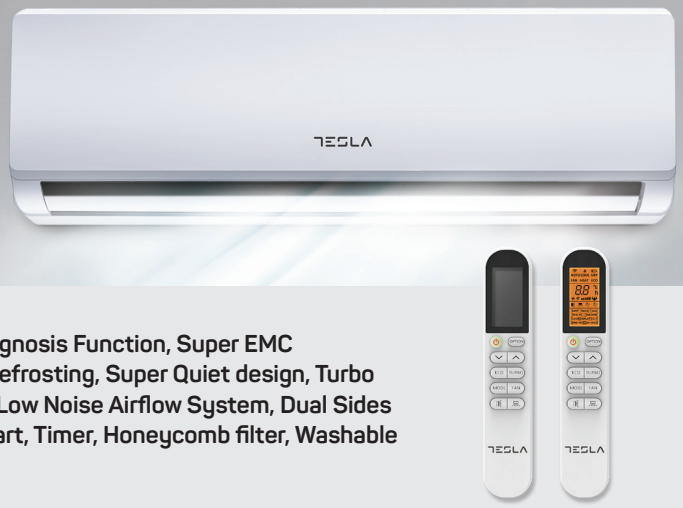

FEATURES

Anti-Fungus function, Self-Cleaning, Self-diagnosis Function, Super EMC performance, Anti-Rust Cabinet, Intelligent defrosting, Super Quiet design, Turbo Function, Sleep Mode, Fault Code indication, Low Noise Airflow System, Dual Sides Water Outlet, Multiple Fan Speed, Auto-Restart, Timer, Honeycomb filter, Washable Filter, Ionizer filter, I FEEL function

Capacity				12000BTU	
Rated volt and frequency			V/Hz	220-240V~/50HZ	
Mode				**Cooling**	**Heating**
Rated capacity			W	3600	3880
Power input			W	1100	1020
Current input			A	5.10	4.70
EER-COP/ Energy Class			W/W	3,21/ A	3,63/ A
Operating range (°C)			°C	0 - 43°C	-5°C - 24°C
Dehumidifying			Kg/h	1.2	
Degree of protection (IN) / (OUT)			(IP)	IPX4/IPX4	
Class of electric protection (IN) / (OUT)			Class I / Class II	I/I	
Max. input consumption			W	1430	
Max. current			A	6.6	
Compressor		Model		44A263BK-FJKC	
		Type (Rotary/Piston/scroll)		Rotary	
		Brand		RECHI	
Indoor	Fan motor	Model		1170030047F	
		Power input	**W**	14W output	
		Capacity	**uF**	1.5	
		Indoor Fan Speed RPM	**r/min**	≤1300	
	Indoor fan	Dia. / Length	**mm**	φ92×578	
	Indoor Air Circulation (m^3/h)		m^3/h	550	
	Indoor Noise Level dB		dB(A)	34/36/39/42	
	Net Dimension (L×W×H)		mm	760x245x200	
	Packing Dimension (L×W×H)		mm	855x315x260	
	Net Weight/Gross Weight		Kg	7/9	
Outdoor	Fan motor	Model		GZSDJ-03	
		Power input	**W**	25W output	
		Capacity	**uF**	2.5	
		Outdoor Fan Speed RPM	**r/min**	≤860	
	Outdoor fan	Dia. / Length	**mm**	φ408×132	
	Outdoor Noise Level dB		**dB(A)**	43/48/50/52	
	Net Dimension (L×W×H)		**mm**	785x305x555	
	Packing Dimension (L×W×H)		**mm**	816x325x525	
	Net Weight/Gross Weight		**Kg**	27/29	
	Refrigerant type/weight		**g**	R410A/630g(2088)	
	Design pressure (Hi/Low)		**Mpa**	4.5/1.9	
Refrigerant piping		Liquid side / Gas side	**mm**	6,35/9,52	
		Max. refrigerant pipe length / Max. difference in level	**m**	15/5	