


## TESLA TT51X81-18410IAW

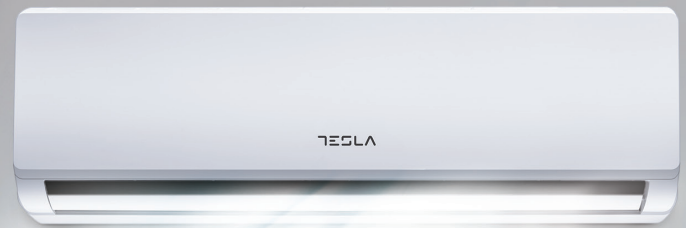

### FEATURES

Anti-Fungus function, Self-Cleaning, Self-diagnosis Function, Super EMC performance, Anti-Rust Cabinet, Intelligent defrosting, Super Quiet design, Turbo Function, Sleep Mode, Fault Code indication, Low Noise Airflow System, Dual Sides Water Outlet, Multiple Fan Speed, Auto-Restart, Timer, Honeycomb filter, Washable Filter, Ionizer filter, Wi-Fi Included, I FEEL function

<b>Capacity</b>			18000BTU	
<b>Rated volt and frequency</b>		V/Hz	220-240V~/50HZ	
<b>Mode</b>			<b>Cooling</b> <b>Heating</b>	
<b>Rated capacity</b>		W	5120 (1310~5730)                      5230(1330~6540)	
<b>Power input</b>		W	1500    1500	
<b>Current input</b>		A	6.70    6.70	
<b>SEER-SCOP/ Energy Class</b>		W/W	6,3/ A++    4,0/A+	
<b>Operating range (°C)</b>			14 - 53°C    -20°C - 30°C	
<b>Dehumidifying</b>		Kg/h	1.8	
<b>Degree of protection (IN) / (OUT)</b>		(IP)	IPX4/IPX4	
<b>Class of electric protection (IN) / (OUT)</b>		Class I / Class II	I/I	
<b>Max. input consumption</b>		W	2350	
<b>Max. current</b>		A	11	
<b>Compressor</b>		Model	C-6RZ146H1DJ	
		Type	Rotary	
		Brand	SANYO	
<b>Indoor</b>	<b>Fan motor</b>	Model	210900495E	
		Power input	W	25W output
		Capacity	uF	/
		Indoor Fan Speed RPM	r/min	≤1350
	<b>Indoor fan</b>	Dia. / Length	mm	φ98×702
		Indoor Air Circulation (m³/h)	m³/h	800/815
	<b>Indoor Noise Level dB</b>		dB(A)	27/35/40/43
	<b>Net Dimension (L×W×H)</b>		mm	910×294×206
	<b>Packing Dimension (L×W×H)</b>		mm	979×372×277
<b>Net Weight/Gross Weight</b>		Kg	10/13	
<b>Outdoor</b>	<b>Fan motor</b>	Model	GZSDJ-33(DC)	
		Power input	W	40W output
		Capacity	uF	/
		Outdoor Fan Speed RPM	r/min	≤1000
	<b>Outdoor fan</b>	Length	mm	φ439×154
	<b>Outdoor Noise Level dB</b>		dB(A)	43/47/52/55
	<b>Net Dimension (L×W×H)</b>		mm	835×605×360
	<b>Packing Dimension (L×W×H)</b>		mm	883×645×394
	<b>Net Weight/Gross Weight</b>		Kg	37/38
	<b>Refrigerant type/weight</b>		g	R410A/1350/2088
<b>Max. Discharge/Max. Suction pressure</b>		Mpa	4.5/1.9	
<b>Refrigerant piping</b>	Liquid side / Gas side	mm	6.35/12.7	
	Max. refrigerant pipe length / Max. difference in level	m	25/10	