


TESLA TA36FFML-1232IAPC

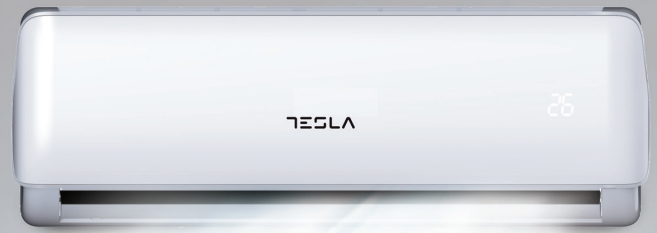

FEATURES

Anti-Fungus function, Self-Cleaning, Self-diagnosis Function, Super EMC performance, Anti-Rust Cabinet, Intelligent defrosting, Super Quiet design, Backup Switch, Turbo Operation, Hydrophilic Aluminium Fin, Sleep Mode, Fault Code indication, Low Noise Airflow System, Dual Sides Water Outlet, Multiple Fan Speed, Auto-Restart, Timer, Air blade, Washable Filter, Anti-Cold-Air (Heat Pump Only), I FEEL function, Instalation Kit

Capacity				12000BTU
Rated volt and frequency			V/Hz	220-240V~/50HZ
Mode				CoolingHeating
Rated capacity			W	3500(800~3500)3500(1000~3600)
Power input			W	1090970
Current input			A	4.824.28
SEER-SCOP/ Energy Class			W/W	6.1/A++4.07/A+
Operating range (°C)				14 - 43°C-15 - 30°C
Dehumidifying			Kg/h	1.2
Degree of protection (IN) / (OUT)			(IP)	IPX4/IPX4
Class of electric protection (IN) / (OUT)			Class I / Class II	I/I
Max. input consumption			W	1900
Max. current			A	9.5
Compressor		Model		KSK89D59UFZE
		Type		DC
		Brand		GMCC
Indoor	Fan motor	Model		YYK12-4B
		Power input	W	12
		Capacity	uF	1.5
		Indoor Fan Speed RPM	r/min	1150
	Indoor fan	Dia. / Length	mm	Ø97.8 / 558
	Indoor Air Circulation (m³/h)		m³/h	560
	Indoor Noise Level dB		dB(A)	53
	Net Dimension (L×W×H)		mm	770x280x200
	Packing Dimension (L×W×H)		mm	840x345x280
	Net Weight/Gross Weight		Kg	8/10.5
Outdoor	Fan motor	Model		D-24-8
		Power input	W	24
		Capacity	uF	1.5
		Outdoor Fan Speed RPM	r/min	900
	Outdoor fan	Length	mm	390
	Outdoor Noise Level dB		dB(A)	59
	Net Dimension (L×W×H)		mm	800x315x545
	Packing Dimension (L×W×H)		mm	840x365x600
	Net Weight/Gross Weight		Kg	25/27.5
	Refrigerant type/weight		g	R32/600
Max. Discharge/Max. Suction pressure		Mpa	4,28/1,18	
Refrigerant piping		Liquid side / Gas side	mm	6.35 (1/4) / 9,53 (3/8)
		Max. refrigerant pipe length / Max. difference in level	m	15/10