



Turbo mode

When the air conditioner goes into Turbo mode, it will maximize its cooling or heating capacity, making the room cooler or warmer rapidly.



I FEEL

The remote control can keep track of the temperature at its current location and send the signal to the air conditioner, so it can optimize the room temperature for your maximum comfort.



Anti-fungus

The air conditioner will start the Anti-fungus feature after exiting cooling and dehumidifying mode. It helps prevent fungi and bacteria from spreading in order to maintain a healthy environment.



Horizontal swing

You can use the horizontal swing feature to adjust the airflow direction, if you prefer the air from the AC to blow sideways.




Intelligent defrosting

If the condenser freezes while in heating mode during the times of low outside temperature, the AC will start intelligent defrosting mode.

Wi-Fi

Wi-Fi feature means that Tesla air conditioner can also be controlled with mobile phones or other smart devices: an option that adds to your everyday convenience and comfort!

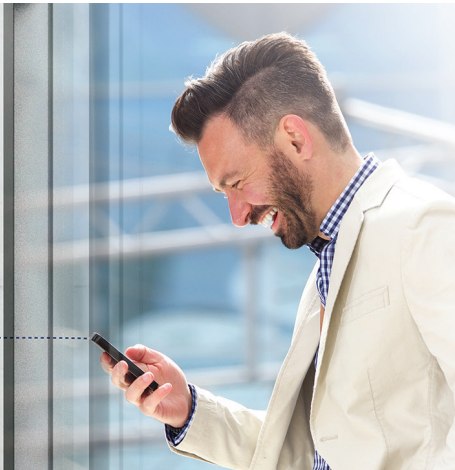



Features

I Feel / Follow me, ECO, Self-diagnostic, Intelligent defrosting, Self-Cleaning Function, Intelligent dusting, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Sleep Mode, Fault Code Indication, Emergency button, Auto restart, Timer, 4-Fan Speed, Five-speed outdoor fan, 12 grades indoor fan speed, Golden fin, Mono & multi compatibility, 8°C heating feature, Low-Temperature Heating/Cooling, Washable filter, High-density filter, Cold-catalyst filter, Super Ionizer, Low ambient kit, 1W Standby, Dual side Drainage, 3D Air Flow, Refrigerant Leakage Detect, Remote control, Louver position memory function, Horizontal louver auto-swing, Hidden led display, Display ON/OFF, RC holder, Hydrophilic Aluminum Fin, Backup Switch, Intelligent on-off, Auto Swing Louver function, Anti-Cold Air, Horizontal swing, Wi-Fi

Capacity		12000BTU	
Rated volt and frequency		220-240V~/50HZ	
Mode	V/Hz	Cooling	Heating
Rated capacity		12000(3800~13400)	10000(2800~11500)
Power input	W	1320(83~1600)	1190(167~1400)
Current input	W	5.8(0.8~7.3)	5.3(1.4~6.4)
SEER-/ Energy Class	A	6,5/A++	/
SCOP/ Energy Class - average		/	4,1/A+
SCOP/ Energy Class - warmer		/	5,2/A+++
Operating range		15-50	-20-30
Energy consumption (per year, based on standard test results)	°C	188	/
Energy consumption (per year, based on standard test results) - average	kWh	/	957
Energy consumption (per year, based on standard test results) - warmer	kWh	/	823
Dehumidifying	Kg/h	1,7	
Degree of protection (IN) / (OUT)	(IP)	IPX0/IPX4	
Class of electric protection (IN) / (OUT)	Class I / Class II	I/I	
Max. input consumption	W	2150	
Max. current	A	10	
Compressor	Model	KSK103D32UEZ31	
	Type	Rotary	
	Brand	GMCC	
Indoor	Indoor Air Circulation	m ³ /h	530
	Indoor Noise Level dB	dB(A)	39.5/35.5/25/21.5
	Net Dimension	mm	805x194x285
	Packing Dimension	mm	870x270x365
	Net Weight/Gross Weight	Kg	7.3/9.5
Outdoor	Outdoor Noise Level dB	dB(A)	64
	Net Dimension	mm	720x270x495
	Packing Dimension	mm	835x300x540
	Net Weight/Gross Weight	Kg	21/22.8
	Refrigerant type		R32
	Refrigerant weight	Kg	0,52
	GWP		675
	tCO ₂ eq.		0,35
Max. Discharge/Max. Suction pressure	Mpa	4.3/1.7	
Refrigerant piping	Liquid side/ Gas side/Length	mm	Dg4/Dg8 (1/4-3/8)
	Max. refrigerant pipe length/ Max. difference in level	m	25/10