

I FEEL

The remote control can keep track of the temperature at its current location and send the signal to the air conditioner, so it can optimize the room temperature for your maximum comfort.



Self-diagnostic

The air conditioner is able to monitor its operations and identify problematic or faulty parts. If they're found, the system will switch off automatically, while the error code will be displayed on the indoor unit.



Anti-fungus

The air conditioner will start the Anti-fungus feature after exiting cooling and dehumidifying mode. It helps prevent fungi and bacteria from spreading in order to maintain a healthy environment.



Noise-minimizing design

With an optimized operating mechanism, sound insulating materials for compressor, low-noise fan motor and ventilation structure that combines modern technology with aerodynamic design, this AC model minimizes noise levels while creating your perfect room temperature.




Turbo mode

When the air conditioner goes into Turbo mode, it will maximize its cooling or heating capacity, making the room cooler or warmer rapidly.



Auto cleaning

When this feature is activated, the indoor unit starts operating in cooling mode with a low fan speed, while the condensed water cleans dust from the evaporator fins. The AC then switches to heating with low fan speed, drying the inside of the indoor unit. Finally, it turns to fan-only mode and blows away the rest of the moisture. The whole process keeps the indoor unit dry and prevents bacterial growth.

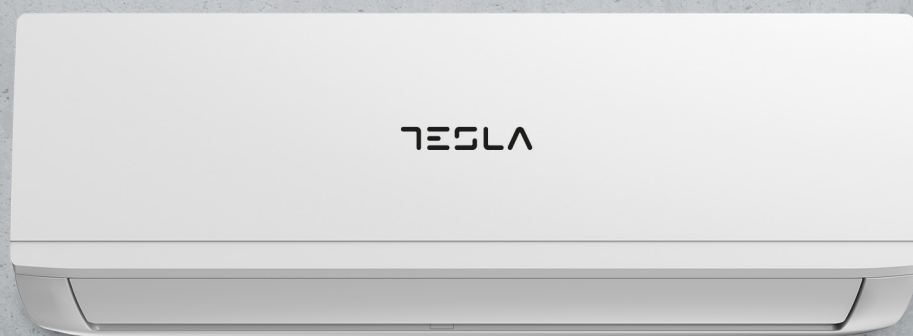

Features

I Feel / Follow me, Breeze away, ECO, Self-diagnostic, Intelligent defrosting, Intelligent dusting switch, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Sleep Mode, Fault Code Indication, Emergency button, Auto restart, Timer Auto turn off/of, Five-speed outdoor fan motor, Golden fin, Mono & multi compatibility, 8°C heating feature, Low-Temperature Heating/Cooling, Washable filter, High-density filter, Cold-catalyst filter, Low ambient kit, 1W Standby, Dual side Drainage, Stability Protection, 3D Air Flow, 56°C sterilization, Refrigerant Leakage Detect, Remote control, Louver position memory function, Horizontal louver auto-swing, Hidden led display, Display ON/OFF, Rapid Cooling, and Rapid Heating, RC holder, Hydrophilic Aluminum Fin, Backup Switch, Multi Fan Speed, I-clean, Intelligent on-off, Auto Swing Louver function, Anti-Cold Air

Capacity			9000BTU
Rated volt and frequency		V/Hz	220-240V~/50HZ
Mode			Cooling Heating
Rated capacity		W	2367 (1025-3223) 2930 (820-3369)
Power input		W	733 771
Current input		A	3, 18 3, 35
SEER-SCOP/ Energy Class		W/W	7, 4/ A++ 4, 1/A+
Operating range		(°C)	15°C - 50°C -15°C - 24°C
Energy consumption (per year, based on standard test results)		kwh	
Dehumidifying		Kg/h	1,0
Degree of protection (IN) / (OUT)		(IP)	IPX4/IPX4
Class of electric protection (IN) / (OUT)		Class I / Class II	I/I
Max. input consumption		W	2150
Max. current		A	10
Compressor	Model		KSK103D33UEZ3(YJ)
	Type		Rotary
	Brand		GMCC
Indoor	Fan motor	Model	ZKFP-13-8-4
		Power input	W
		Capacity	uF
		Indoor Fan Speed RPM	700/900/1050
	Indoor fan	Dia. / Length	mm φ7
	Indoor Air Circulation		m³/h 520
	Indoor Noise Level dB		dB(A) 37/32/22
	Net Dimension (L×W×H)		mm 726x210x291
	Packing Dimension (L×W×H)		mm 790x270x375
	Net Weight/Gross Weight		Kg 38633
Outdoor	Fan motor	Model	ZKFN-20-8-1
		Power input	W
		Capacity	uF
		Outdoor Fan Speed RPM	r/min 800
	Outdoor fan	Length	mm 815
	Outdoor Noise Level dB		dB(A) 62
	Net Dimension (L×W×H)		mm 720x270x495
	Packing Dimension (L×W×H)		mm 835x300x540
	Net Weight/Gross Weight		Kg 23.5/25.4
	Refrigerant type/weight		g R32/675g
	Max. Discharge/Max. Suction pressure		Mpa 4,3/1.7
Refrigerant piping		Liquid side / Gas side	mm φ6.35/φ9,52
		Max. refrigerant pipe length / Max. difference in level	m 25/10