Tesla Select





Turbo mode

When the air conditioner goes into Turbo mode, it will maximize its cooling or heating capacity, making the room cooler or warmer rapidly.



I FEEL

The remote control can keep track of the temperature at its current location and send the signal to the air conditioner, so it can optimize the room temperature for your maximum comfort.



Anti-fungus

The air conditioner will start the Anti-fungus feature after exiting cooling and dehumidifying mode. It helps prevent fungi and bacteria from spreading in order to maintain a healthy environment.




Horizontal swing

You can use the horizontal swing feature to adjust the airflow direction, if you prefer the air from the AC to blow sideways.



Intelligent defrosting

If the condenser freezes while in heating mode during the times of low outside temperature, the AC will start intelligent defrosting mode.

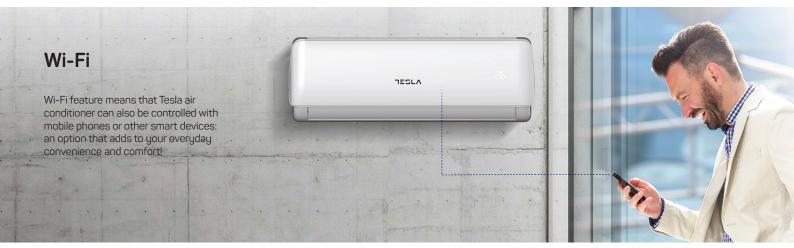

JESLA

R32 Inverter Split Type Model TM28I13-0932IAW



Features

I Feel / Follow me, Breeze away, ECO, Self-diagnostic, Intelligent defrosting, Intelligent dusting switch, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Sleep Mode, Fault Code Indication, Emergency button, Auto restart, Timer Auto turn off/of, Five-speed outdoor fan motor, Golden fin, Mono & multi compatibility, 8°C heating feature, Low-Temperature Heating/Cooling, Washable filter, High-density filter, Cold-catalyst filter, Low ambient kit, 1W Standby, Dual side Drainage, Stability Protection, 3D Air Flow, 56°C sterilization, Refrigerant Leakage Detect, Remote control, Louver position memory function, Horizontal louver auto-swing, Hidden led display, Display ON/OFF, Rapid Cooling, and Rapid Heating, RC holder, Hydrophilic Aluminum Fin, Backup Switch, Multi Fan Speed, I-clean, Intelligent on-off, Auto Swing Louver function, Anti-Cold Air, Horizontal swing, Wi-Fi

Capacity			9000BTU		
Rated volt and frequency			V/Hz	220-240V~/50HZ	
Mode			Cooling	Heating	
Rated capacity			W	2367 (1025-3223)	2930 (820-3369
Power input		W	733	771	
Current input			A	3, 18	3, 35
SEER-SCOP/ Energy Class			W/W	7, 4/ A++	4, 1/A+
Operating range			(°C)	15°C - 50°C	-15°C - 24°C
Energy consumption (per year, based on standard test results)		kwh			
Dehumidifying			Kg/h	1,0	
Degree of protection (IN) / (OUT)			(IP)	IPX4/IPX4	
Class of electric protection (IN) / (OUT)			Class I / Class II	١/١	
Max. input consumption			W	2150	
Max. current			A	10	
		Model		KSK103D33UEZ3(YJ)	
С	ompressor	Туре		Rotary	
		Brand		GMCC	
	Fan motor	Model		ZKFP-13-8-4	
		Power input	W	40W output	
		Capacity	uF		
		Indoor Fan Speed RPM	r/min	700/900/1050	
2 0	Indoor fan	Dia. / Length	mm	φ7	
Indoor	Indoor Air Circulation		m³/h	520	
	Indoor Noise Level dB		dB(A)	37/32/22	
	Net Dimension (L×W×H)		mm	726x210x291	
	Packing Dimension (L×W×H)		mm	790x270x375	
	Net Weight/Gross Weight		Kg	38633	
	Fan motor	Model		ZKFN-20-8-1	
		Power input	W	/	
		Capacity	uF	/	
		Outdoor Fan Speed RPM	r/min	800	
P	Outdoor fan	Length	mm	815	
Dutdoor	Outdoor Noise L		dB(A)	62	
ō	Net Dimension (L×W×H)		mm	720x270x495	
	Packing Dimension (L×W×H)		mm	835x300x540	
	Net Weight/Gross Weight		Kg	23.5/25.4	
	Refrigerant type/weight		g	R32/675g	
	Max. Discharge/Max. Suction pressure		Mpa	4,3/1.7	
	Liquid side / Gas side		mm	φ6.35/φ9,52	
Refrigerant piping		Max. refrigerant pipe length / Max. difference in level	m	25/10	