



Turbo mode

When the air conditioner goes into Turbo mode, it will maximize its cooling or heating capacity, making the room cooler or warmer rapidly.



I FEEL

The remote control can keep track of the temperature at its current location and send the signal to the air conditioner, so it can optimize the room temperature for your maximum comfort.



Anti-fungus

The air conditioner will start the Anti-fungus feature after exiting cooling and dehumidifying mode. It helps prevent fungi and bacteria from spreading in order to maintain a healthy environment.



Horizontal swing

You can use the horizontal swing feature to adjust the airflow direction, if you prefer the air from the AC to blow sideways.




Intelligent defrosting

If the condenser freezes while in heating mode during the times of low outside temperature, the AC will start intelligent defrosting mode.

Wi-Fi

Wi-Fi feature means that Tesla air conditioner can also be controlled with mobile phones or other smart devices: an option that adds to your everyday convenience and comfort!



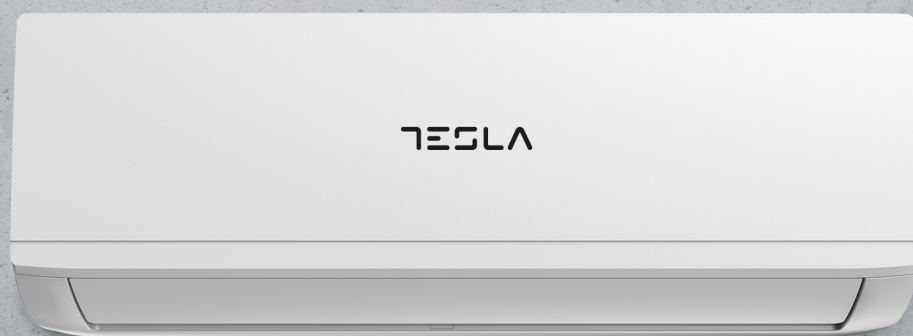

Features

I Feel / Follow me, Breeze away, ECO, Self-diagnostic, Intelligent defrosting, Intelligent dusting switch, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Sleep Mode, Fault Code Indication, Emergency button, Auto restart, Timer Auto turn off/of, Five-speed outdoor fan motor, Golden fin, Mono & multi compatibility, 8°C heating feature, Low-Temperature Heating/Cooling, Washable filter, High-density filter, Cold-catalyst filter, Low ambient kit, 1W Standby, Dual side Drainage, Stability Protection, 3D Air Flow, 56°C sterilization, Refrigerant Leakage Detect, Remote control, Louver position memory function, Horizontal louver auto-swing, Hidden led display, Display ON/OFF, Rapid Cooling, and Rapid Heating, RC holder, Hydrophilic Aluminum Fin, Backup Switch, Multi Fan Speed, I-clean, Intelligent on-off, Auto Swing Louver function, Anti-Cold Air, Horizontal swing, Wi-Fi

Capacity			12000BTU
Rated volt and frequency		V/Hz	220-240V~/50HZ
Mode			CoolingHeating
Rated capacity		W	3600(1250-4310)3900(1250-4380)
Power input		W	1096(110-1650)1027(110-1480)
Current input		A	4.76(0.5~7.2)4.46(0.5~6.4)
SEER-SCOP/ Energy Class		W/W	7/ A++4, 2/A+
Operating range		(°C)	15°C - 50°C-15°C - 24°C
Energy consumption (per year, based on standard test results)		kwh	182833
Dehumidifying		Kg/h	1,0
Degree of protection (IN) / (OUT)		(IP)	IPX4/IPX4
Class of electric protection (IN) / (OUT)		Class I / Class II	I/I
Max. input consumption		W	2150
Max. current		A	10
Compressor		Model	KSK103D33UEZ3(YJ)
		Type	Rotary
		Brand	GMCC
Indoor	Fan motor	Model	ZKFP-13-8-4
		Power input	W40W output
		Capacity	uF
		Indoor Fan Speed RPM	r/min700/900/1050
	Indoor fan	Dia. / Length	mmφ7
	Indoor Air Circulation		m³/h530
	Indoor Noise Level dB		dB(A)56/37/32/22
	Net Dimension (L×W×H)		mm835x208x295
	Packing Dimension (L×W×H)		mm905x290x356
	Net Weight/Gross Weight		Kg8,7/11,5
Outdoor	Fan motor	Model	ZKFN-20-8-1
		Power input	W/
		Capacity	uF/
		Outdoor Fan Speed RPM	r/min800
	Outdoor fan	Length	mm815
	Outdoor Noise Level dB		dB(A)62
	Net Dimension (L×W×H)		mm720x270x495
	Packing Dimension (L×W×H)		mm835x300x540
	Net Weight/Gross Weight		Kg23,7/25,5
	Refrigerant type/weight		gR32/650g
	Max. Discharge/Max. Suction pressure		Mpa4,3/1.7
Refrigerant piping		Liquid side / Gas side	mmφ6.35/φ9,52
		Max. refrigerant pipe length / Max. difference in level	m25/10