

## 3 IN 1 FILTER

With a filter that combines polyphenols, anion and vitamin C, this Tesla AC model can help you reduce the amount of dust, allergens, and harmful microorganisms in the air.




## REMOTE CONTROL WITH BACKLIGHT

The LCD backlight makes the buttons on the remote light up each time you press them: a feature quite useful if you want to double-check if you have correctly entered a command.



## SUPER MUTE MODE

The super mute option is a helpful feature that significantly reduces the noise the unit makes. This can be especially beneficial in areas where sound levels must remain low, such as bedrooms or offices.




## 3D AIRFLOW

Depending on the model, you can choose between different air dispersion positions available, such as blanket-style, shower-style, breeze etc.



## HORIZONTAL SWING

You can use the horizontal swing feature to adjust the airflow direction, if you prefer the air from the AC to blow sideways.

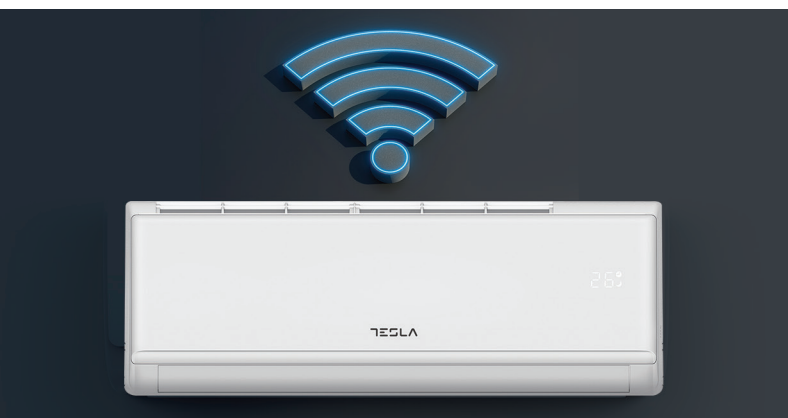

## WI-FI

Wi-Fi feature means that Tesla air conditioner can also be controlled with mobile phones or other smart devices: an option that adds to your everyday convenience and comfort!



## Features

I Feel / Follow me, Smart Air Flow, ECO, Super EMC performance, Self-diagnostic, Intelligent defrosting, Self-Cleaning Function, Anti-fungus Function, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Auto mode, Sleep Mode, Fault Code Indication, Emergency button, Auto restart, Timer Auto turn off/on, 4-Fan Speed, Five speed outdoor fan motor, Mono & multi compatibility, 8°C heating feature, Low Temperature Heating/Cooling, Honeycomb filter, Washable filter, High density filter, Dual side Drainage, Stability Protection, 3D Air Flow, 56°C sterilization, Refrigerant Leakage Detect, Remote control, Louver position memory, Horizontal louver auto swing, Hidden led display, Display ON/OFF, Comfortable Cooling, Strong Cooling at 60°C, Rapid Cooling and Rapid Heating, Horizontal swing, RC holder, Additional Health filter, Hydrophilic Aluminum Fin, Backup Switch, Multi Fan Speed Equipped, I-clean, Top plate/cover, Auto Swing Louver function, Anti-Cold Air, Wi Fi, Super mute mode, 3D Air flow, Remote with backlight, Special coating for evaporator, 3in1 Filter

<b>Capacity</b>			12000BTU
<b>Rated volt and frequency</b>		V/Hz	220-240V~/50Hz/1P
<b>Mode</b>			<b>Cooling</b> <b>Heating</b>
<b>Rated capacity</b>		W	3400(1000~3770)                      3420(1000~3810)
<b>Power input</b>		W	1130(290-1500)                      922(290-1720)
<b>Current input</b>		A	5.8(1.5-9.0)                      4.7(1.5-10.0)
<b>SEER / Energy Class</b>			6,1/A++                      /
<b>SCOP / Energy Class - average</b>			/                      4.0/A+
<b>SCOP / Energy Class - warmer</b>			/                      5,1/A+++
<b>Operating range (°C)</b>		°C	15-53                      -20-30
<b>Energy consumption (per year, based on standard test results)</b>		kWh	195                      /
<b>Energy consumption (per year, based on standard test results) - average</b>		kWh	/                      840
<b>Energy consumption (per year, based on standard test results) - warmer</b>		kWh	/                      714
<b>Dehumidifying</b>		Kg/h	1,2
<b>Degree of protection (IN) / (OUT)</b>		(IP)	IPX0/IPX4
<b>Class of electric protection (IN) / (OUT)</b>		Class I / Class II	I/I
<b>Max. input consumption</b>		W	1720
<b>Max. current</b>		A	10
<b>Compressor</b>		Model	
		Type	Rotary
		Brand	GMCC
<b>Indoor</b>	Indoor Air Circulation	m <sup>3</sup> /h	550
	Indoor Noise Level dB	dB(A)	50/47/43/35/32
	Net Dimension	mm	777×250×201
	Packing Dimension	mm	840×315×260
	Net Weight / Gross Weight	Kg	8/10,5
<b>Outdoor</b>	Outdoor Noise Level dB	dB(A)	50
	Net Dimension	mm	777×498×290
	Packing Dimension	mm	818×520×325
	Net Weight / Gross Weight	Kg	24/26
	Refrigerant Type		R32
	Refrigerant Weight	g	0,57
	GWP		675
	tCO <sub>2</sub> eq.		0,38
<b>Max. Discharge / Max. Suction pressure</b>		Mpa	3,7/1,2
<b>Refrigerant piping</b>	Liquid side / Gas side / Length	mm	Dg4/Dg8 (1/4-3/8)
	Max. refrigerant pipe length / Max. difference in level	m	25/10