

3 IN 1 FILTER

With a filter that combines polyphenols, anion and vitamin C, this Tesla AC model can help you reduce the amount of dust, allergens, and harmful microorganisms in the air.




REMOTE CONTROL WITH BACKLIGHT

The LCD backlight makes the buttons on the remote light up each time you press them: a feature quite useful if you want to double-check if you have correctly entered a command.



SUPER MUTE MODE

The super mute option is a helpful feature that significantly reduces the noise the unit makes. This can be especially beneficial in areas where sound levels must remain low, such as bedrooms or offices.




3D AIRFLOW

Depending on the model, you can choose between different air dispersion positions available, such as blanket-style, shower-style, breeze etc.



HORIZONTAL SWING

You can use the horizontal swing feature to adjust the airflow direction, if you prefer the air from the AC to blow sideways.

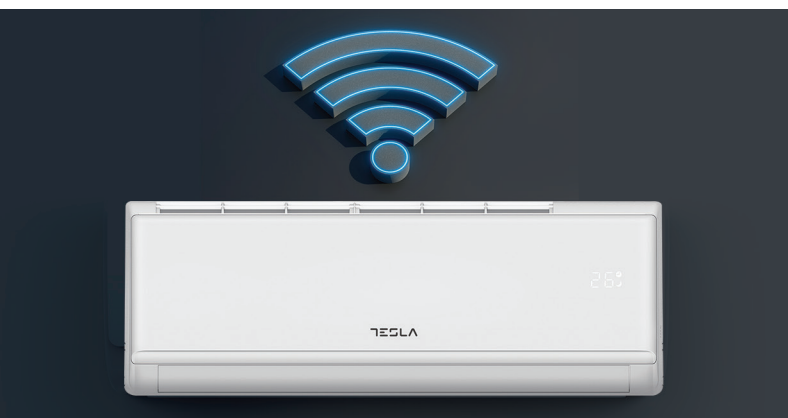

WI-FI

Wi-Fi feature means that Tesla air conditioner can also be controlled with mobile phones or other smart devices: an option that adds to your everyday convenience and comfort!



Features

I Feel / Follow me, Smart Air Flow, ECO, Super EMC performance, Self-diagnostic, Intelligent defrosting, Self-Cleaning Function, Anti-fungus Function, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Auto mode, Sleep Mode, Fault Code Indication, Emergency button, Auto restart, Timer Auto turn off/on, 4-Fan Speed, Five speed outdoor fan motor, Mono & multi compatibility, 8°C heating feature, Low Temperature Heating/Cooling, Honeycomb filter, Washable filter, High density filter, Dual side Drainage, Stability Protection, 3D Air Flow, 56°C sterilization, Refrigerant Leakage Detect, Remote control, Louver position memory, Horizontal louver auto swing, Hidden led display, Display ON/OFF, Comfortable Cooling, Strong Cooling at 60°C, Rapid Cooling and Rapid Heating, Horizontal swing, RC holder, Additional Health filter, Hydrophilic Aluminum Fin, Backup Switch, Multi Fan Speed Equipped, I-clean, Top plate/cover, Auto Swing Louver function, Anti-Cold Air, Wi Fi, Super mute mode, 3D Air flow, Remote with backlight, Special coating for evaporator, 3in1 Filter

Capacity			12000BTU
Rated volt and frequency		V/Hz	220-240V~/50Hz/1P
Mode			Cooling Heating
Rated capacity		W	3400(1000~3770) 3420(1000~3810)
Power input		W	1130(290-1500) 922(290-1720)
Current input		A	5.8(1.5-9.0) 4.7(1.5-10.0)
SEER / Energy Class			6,1/A++ /
SCOP / Energy Class - average			/ 4.0/A+
SCOP / Energy Class - warmer			/ 5,1/A+++
Operating range (°C)		°C	15-53 -20-30
Energy consumption (per year, based on standard test results)		kWh	195 /
Energy consumption (per year, based on standard test results) - average		kWh	/ 840
Energy consumption (per year, based on standard test results) - warmer		kWh	/ 714
Dehumidifying		Kg/h	1,2
Degree of protection (IN) / (OUT)		(IP)	IPX0/IPX4
Class of electric protection (IN) / (OUT)		Class I / Class II	I/I
Max. input consumption		W	1720
Max. current		A	10
Compressor		Model	
		Type	Rotary
		Brand	GMCC
Indoor	Indoor Air Circulation	m ³ /h	550
	Indoor Noise Level dB	dB(A)	50/47/43/35/32
	Net Dimension	mm	777×250×201
	Packing Dimension	mm	840×315×260
	Net Weight / Gross Weight	Kg	8/10,5
Outdoor	Outdoor Noise Level dB	dB(A)	50
	Net Dimension	mm	777×498×290
	Packing Dimension	mm	818×520×325
	Net Weight / Gross Weight	Kg	24/26
	Refrigerant Type		R32
	Refrigerant Weight	Kg	0,57
	GWP		675
	tCO ₂ eq.		0,38
	Max. Discharge / Max. Suction pressure	Mpa	3,7/1,2
Refrigerant piping	Liquid side / Gas side / Length	mm	Dg4/Dg8 (1/4-3/8)
	Max. refrigerant pipe length / Max. difference in level	m	25/10