


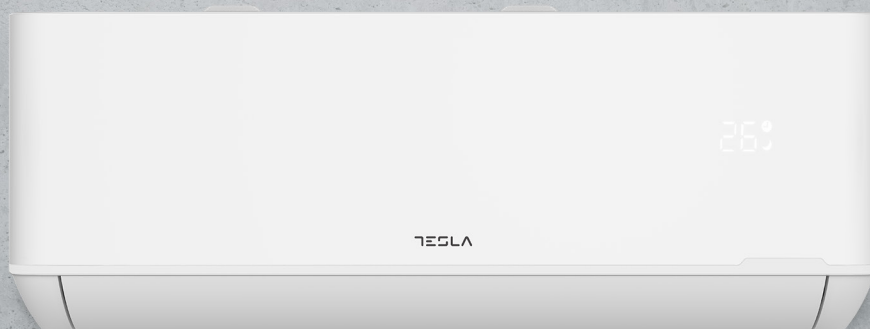

Features

I Feel / Follow me, Breeze away, Smart Air Flow, ECO, Super EMC performance, Self-diagnostic, Intelligent defrosting, Self-Cleaning Function, Anti-fungus Function, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Auto mode, Sleep Mode, Fault Code Indication, Emergency button, Auto restart, Timer Auto turn off/on, 4-Fan Speed, Five speed outdoor fan motor, Mono & multi compatibility, 8°C heating feature, Low Temperature Heating/Cooling, Honeycomb filter, Washable filter, High density filter, Dual side Drainage, Stability Protection, 3D Air Flow, 56°C sterilization, Refrigerant Leakage Detect, Remote control, Louver position memory, Horizontal louver auto swing, Hidden led display, Display ON/OFF, Comfortable Cooling, Strong Cooling at 60°C, Rapid Cooling and Rapid Heating, Horizontal swing, RC holder, Additional Health filter, Hydrophilic Aluminum Fin, Backup Switch, Multi Fan Speed Equipped, I-clean, Top plate/cover, Auto Swing Louver function, Anti-Cold Air, Wi Fi, Additional Health filter, Bipolar Ionic Generator

Capacity			12000BTU	
Rated volt and frequency		V/Hz	220-240V~/50Hz/1P	
Mode			Cooling	Heating
Rated capacity		W	3400(1000~3770)	3430(1000~3810)
Power input		W	1049(290-1500)	922(290-1730)
Current input		A	5.1/A++(1.5-9.0)	4.7(1.5-10.0)
SEER / Energy Class			6,1/A++	/
SCOP / Energy Class - average			/	4.0/A+
SCOP / Energy Class - warmer			/	5,1/A+++
Operating range (°C)		°C	15-53	-20-30
Energy consumption (per year, based on standard test results)		kWh	195	/
Energy consumption (per year, based on standard test results) - average		kWh	/	840
Energy consumption (per year, based on standard test results) - warmer		kWh	/	714
Dehumidifying		Kg/h	1,2	
Degree of protection (IN) / (OUT)		(IP)	IPX0/IPX4	
Class of electric protection (IN) / (OUT)		Class I / Class II	I/I	
Max. input consumption		W	1730	
Max. current		A	10	
Compressor		Model		
		Type	Rotary	
		Brand	GMCC	
Indoor	Indoor Air Circulation		m³/h	560
	Indoor Noise Level dB		dB(A)	51/47/43/35/32
	Net Dimension		mm	790×275×192
	Packing Dimension		mm	860×345×265
	Net Weight / Gross Weight		Kg	8,5/10,5
Outdoor	Outdoor Noise Level dB		dB(A)	50
	Net Dimension		mm	777×498×290
	Packing Dimension		mm	818×520×325
	Net Weight / Gross Weight		Kg	24/26
	Refrigerant Type			R32
	Refrigerant Weight		Kg	560
	GWP			675
	tCO ₂ eq.			378,00
	Max. Discharge / Max. Suction pressure		Mpa	3,7/1,2
Refrigerant piping		Liquid side / Gas side / Length	mm	Dg4/Dg8 (1/4-3/8)
		Max. refrigerant pipe length / Max. difference in level	m	25/10