

# TESLA

R32 Inverter Split Type Model  
TT34TP91-1232IHWT



# BEAT THE HEAT!

Choose Tesla Air-Conditional

A+++/A++  12000  R32



## Odu heater

Heater helps melting ice and snow in the winter, and prevents the outdoor fan from blocking, ensuring optimal performance when the machine is in heating mode.



## A+++

When choosing an AC, it is important to think about energy saving. Most wall-mounted AC models are classified as A+ or higher, while the most energy-efficient units boast the highest energy class (A+++).



## 3D Airflow

Depending on the model, you can choose between different air dispersion positions available, such as blanket-style, shower-style, breeze etc.



## Wi-Fi Feature

Tesla air conditioner can also be controlled with mobile phones or other smart devices, for additional convenience and comfort!




## Night Mode

When this mode is activated, the AC can increase or decrease the temperature by 1°C per hour during the first three hours. It allows the unit to operate in a more energy-efficient and quiet manner during nighttime.

# TESLA

R32 Inverter Split Type Model

TT34TP91-1232IHWT

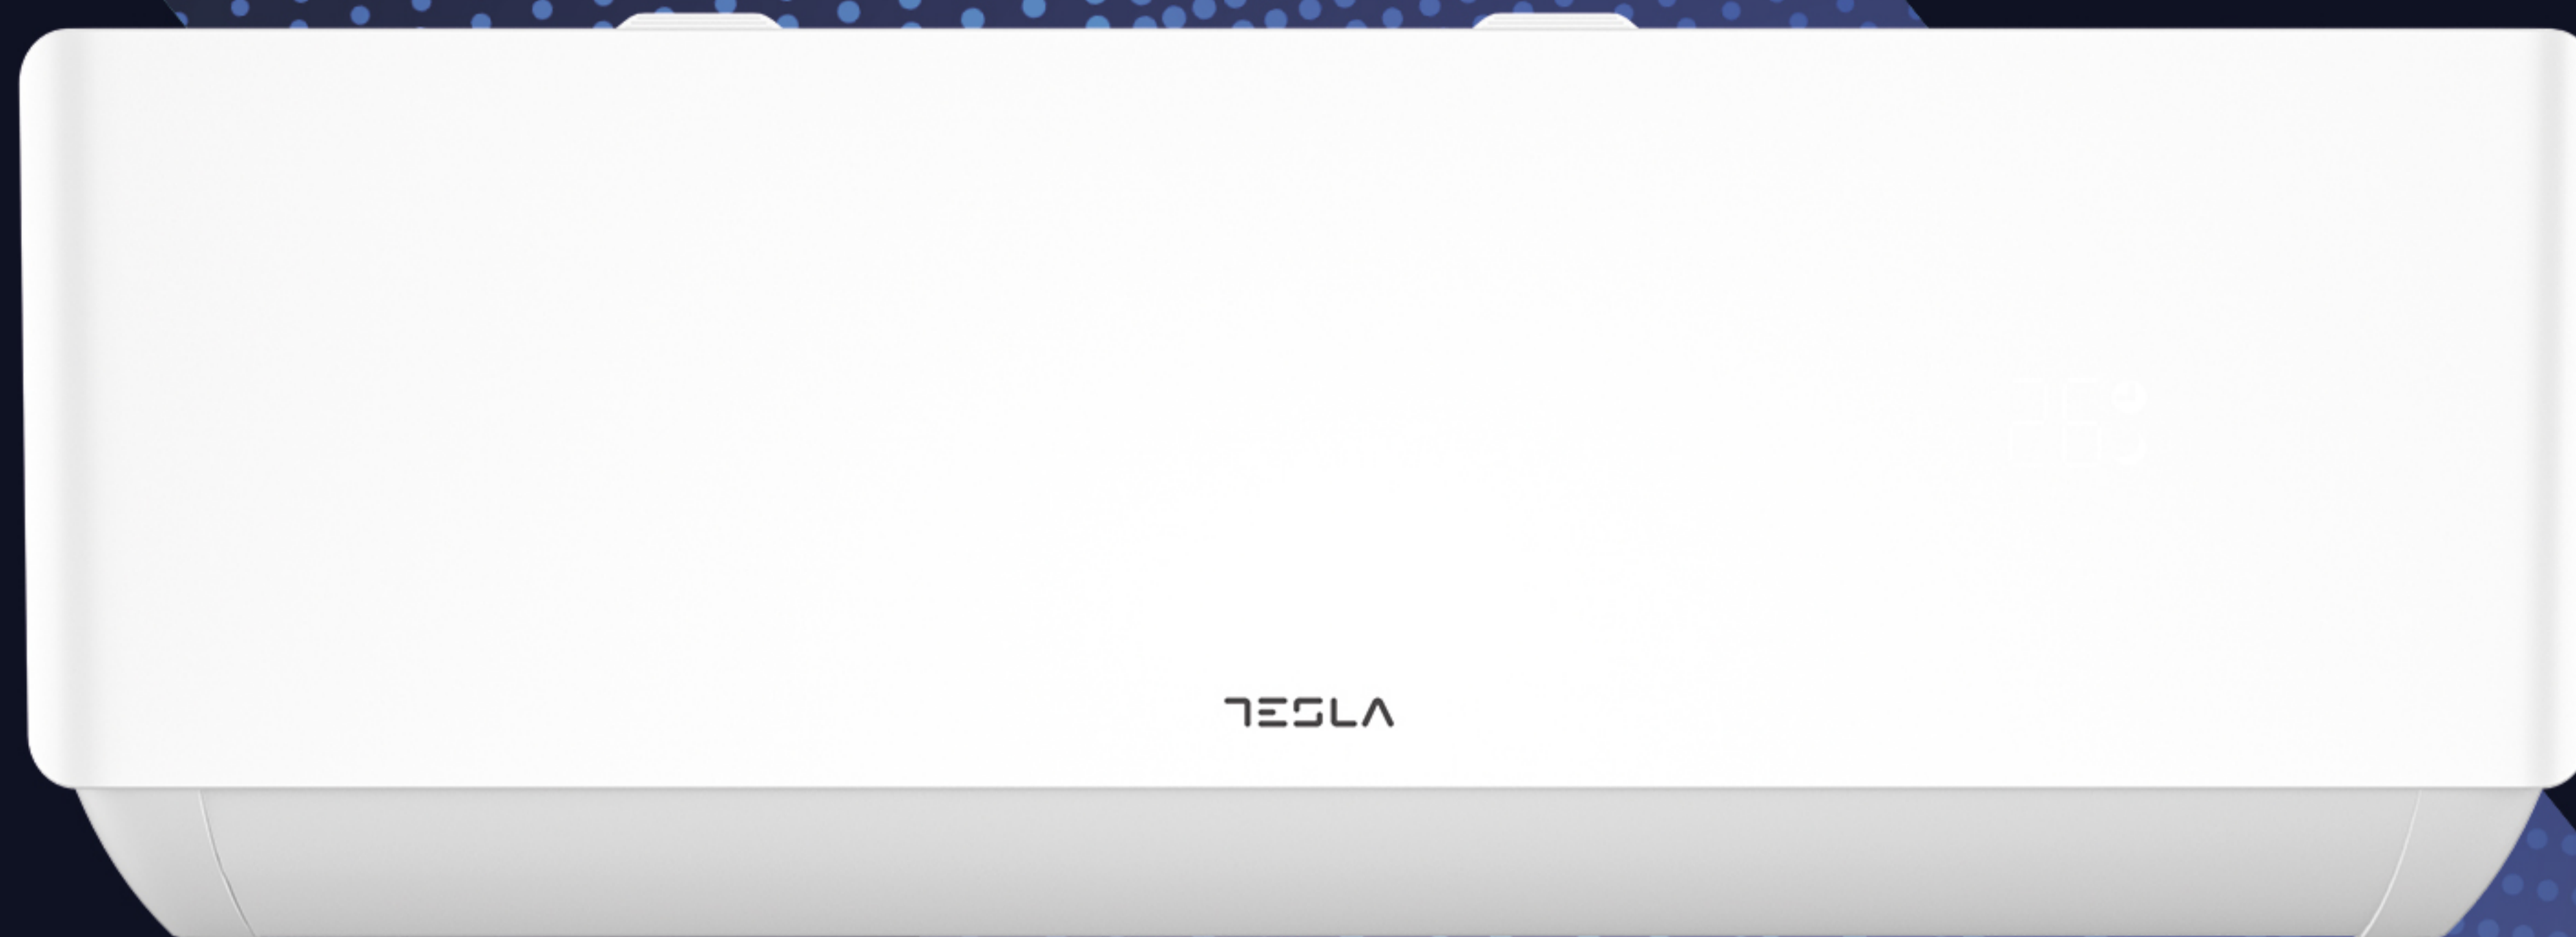

# BEAT THE HEAT!

## FEATURES

|  |  |                                 |                 |
|--|--|---------------------------------|-----------------|
| Capacity   |  | 12000BTU                        |                 |
| Rated volt and frequency   | V/Hz                                   | 220-240V~/50HZ/1 P              |                 |
| Mode   |  | Cooling                         | Heating         |
| Rated capacity   | W                                      | 3510(1000-4600)                 | 3800(1000-4900) |
| Power input  | W                                      | 1000(290-1510)                  | 970(290-1720)   |
| Current input  | A                                      | 4,6(1,5-9,2)                    | 4,4(1,5-10,0)   |
| SEER / Energy Class  |  | 8,5/A+++                        | /               |
| SCOP / Energy Class - average  |  | /                               | 4,6/A++         |
| SCOP / Energy Class - warmer   |  | /                               | 5,6/A+++        |
| Operating range (°C)   | °C                                     | 15-53                           | -25-30          |
| Energy consumption<br>(per year, based on standard test results)           | kWh                                    | 145                             | /               |
| Energy consumption<br>(per year, based on standard test results) - average | kWh                                    | /                               | 792             |
| Energy consumption<br>(per year, based on standard test results) - warmer  | kWh                                    | /                               | 825             |
| Dehumidifying  | Kg/h                                   | 1,2                             |                 |
| Degree of protection (IN) / (OUT)  | (IP)                                   | IPX0/IPX4                       |                 |
| Class of electric protection (IN) / (OUT)                                  | Class I / Class II                     | I/I                             |                 |
| Max. input consumption   | W                                      | 1720                            |                 |
| Max. current   | A                                      | 10                              |                 |
| Compressor   | Model                                  |                                 |                 |
|  | Type                                   | Rotary                          |                 |
|  | Brand                                  | GMCC                            |                 |
| Indoor   | Indoor Air Circulation                 | m <sup>3</sup> /h               | 670             |
|  | Indoor Noise Level dB                  | dB(A)                           | 53/48/43/38/32  |
|  | Net Dimension                          | mm                              | 820x306x195     |
|  | Packing Dimension                      | mm                              | 890x380x265     |
|  | Net Weight / Gross Weight              | Kg                              | 9,5/12          |
| Outdoor  | Outdoor Noise Level dB                 | dB(A)                           | 53              |
|  | Net Dimension                          | mm                              | 795x549x305     |
|  | Packing Dimension                      | mm                              | 835x328x575     |
|  | Net Weight / Gross Weight              | Kg                              | 25/28           |
|  | Refrigerant Type                       |                                 | R32             |
|  | Refrigerant Weight                     | Kg                              | 0,63            |
|  | GWP                                    |                                 | 675             |
|  | tCO <sub>2</sub> eq.                   |                                 | 0,43            |
|  | Max. Discharge / Max. Suction pressure | Mpa                             | 3,7/1,2         |
|  | Refrigerant piping                     | Liquid side / Gas side / Length | mm              |
| Max. refrigerant pipe length /<br>Max. difference in level                 |  | m                               | 25/10           |