


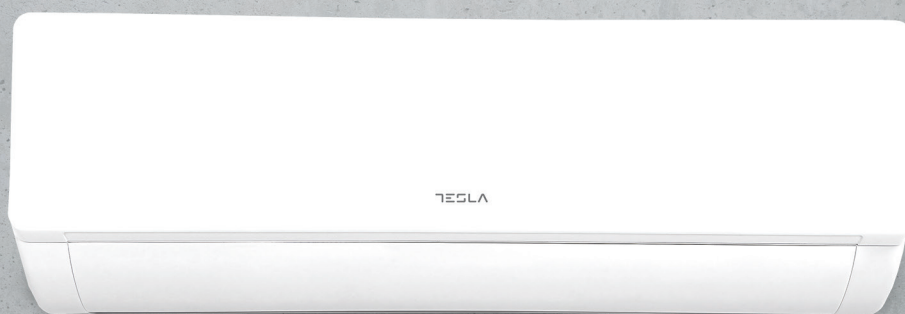

Features

High density filter, Cold-catalyst filter, 56°C clean, low ambient cooling function, golden fin, refrigerant leakage detect, 8°C heating (frost protection), low noise airflow system, turbo operation, horizontal louver autoswing, follow me, Breeze away, Emergency Using (when temp sensor is abnormal), ECO, sleep mode, 1W standby, 2 ways piping connection, auto-restart, timer, π-shaped installation plate, louver position memory function, I Remote (Engineering Mode), GEAR, Wi Fi, Horizontal swing, 4D Air Flow, Holder RC, I Feel

Capacity			12000BTU
Rated volt and frequency			220-240V~/50HZ
Mode		V/Hz	Cooling
Rated capacity			3500(1100~3800)
Power input		W	1460(800~1500)
Current input		W	6.3(0.8~6.7)
SEER-/ Energy Class		A	6,5 A++
SCOP/ Energy Class - average			/
SCOP/ Energy Class - warmer			4,1/A+
Operating range			16~32
Energy consumption (per year, based on standard test results)		°C	189
Energy consumption (per year, based on standard test results) - average		kWh	/
Energy consumption (per year, based on standard test results) - warmer		kWh	/
Dehumidifying		Kg/h	1,2
Degree of protection (IN) / (OUT)		(IP)	IPX0/IPX4
Class of electric protection (IN) / (OUT)		Class I / Class II	I/I
Max. input consumption		W	2200
Max. current		A	10
Compressor	Model		GMCC
	Type		Rotary
	Brand		KSN98D13UEZ32
Indoor	Indoor Air Circulation	m3/h	590
	Indoor Noise Level dB	dB(A)	39/32/24/20
	Net Dimension	mm	813×201×289
	Packing Dimension	mm	870×270×365
	Net Weight/Gross Weight	Kg	7.4/9.7
Outdoor	Outdoor Noise Level dB	dB(A)	63
	Net Dimension	mm	720×270×495
	Packing Dimension	mm	835×300×540
	Net Weight/Gross Weight	Kg	20.4/22.3
	Refrigerant type		R32
	Refrigerant weight	Kg	0,49
	GWP		675
	tCO ₂ eq.		0,33
	Max. Discharge/Max. Suction pressure	Mpa	4.3/1.7
	Liquid side/ Gas side/Length	mm	Dg4/Dg8(1/4-3/8)
Refrigerant piping		Max. refrigerant pipe length/ Max. difference in level	m
			25/10