



## UV lamp

Ultraviolet light offers additional assistance while fighting against unwanted microorganisms. Emitting waves of up to 285 nm, it helps in creating virus and bacteria-free area without negative side effects.



## 56°C sterilization

During the self-cleaning process, the indoor unit operates in a special mode that helps evaporator to dry. This feature is designed to keep the AC indoor unit clean and help prevent bacterial growth.




## Night mode

When this mode is activated, your AC can increase or decrease temperature by 1°C per hour during the first three hours.



## Smart airflow

You can choose between different air dispersion positions available, such as blanket-style, shower-style, breeze etc.




## 8°C heating feature

This option will start the heating mode automatically when the room temperature goes below 8°C, returning to standby once it reaches this number.

## Wi-Fi

Wi-Fi feature means that Tesla air conditioner can also be controlled with mobile phones or other smart devices: an option that adds to your everyday convenience and comfort!

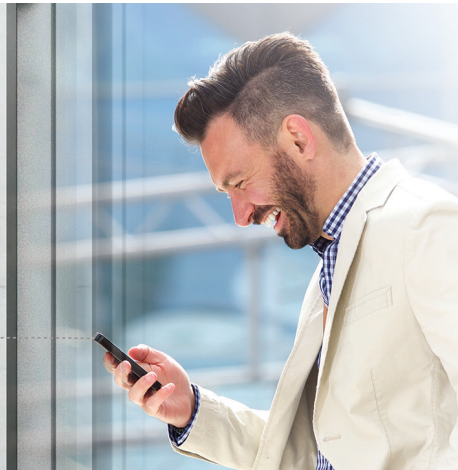



## Features

I Feel / Follow me, Smart Air Flow, ECO, Super EMC performance, Self-diagnostic, Intelligent defrosting, Self-Cleaning Function, Anti-fungus Function, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Auto mode, Sleep Mode, Fault Code Indication, Emergency button, Auto restart, Timer Auto turn off/on, 4-Fan Speed, Five speed outdoor fan motor, Mono & multi compatibility, 8°C heating feature, Low Temperature Heating/Cooling, Honeycomb filter, Washable filter, High density filter, Dual side Drainage, Stability Protection, 3D Air Flow, 56°C sterilization, Refrigerant Leakage Detect, Remote control, Louver position memory, Horizontal louver auto swing, Hidden led display, Display ON/OFF, Comfortable Cooling, Strong Cooling at 60°C, Rapid Cooling and Rapid Heating, Horizontal swing, RC holder, Additional Health filter, Hydrophilic Aluminum Fin, Backup Switch, Multi Fan Speed Equipped, I-clean, Top plate/cover, Auto Swing Louver function, Anti-Cold Air, Wi Fi, Additional Health filter, UV Lamp

<b>Capacity</b>		18000BTU	
<b>Rated volt and frequency</b>	V/Hz	220-240V~/50Hz/1P	
<b>Mode</b>		<b>Cooling</b>	<b>Heating</b>
<b>Rated capacity</b>	W	5100(1250-5900)	5130(1250-6080)
<b>Power input</b>	W	1574(330-2350)	1382(340-2550)
<b>Current input</b>	A	8.2(1.7~12.0)	7.2(1.7~13.0)
<b>SEER / Energy Class</b>		6,1/A++	/
<b>SCOP / Energy Class - average</b>		/	4.0/A+
<b>SCOP / Energy Class - warmer</b>		/	5,1/A+++
<b>Operating range (°C)</b>	°C	15-53	-20-30
<b>Energy consumption (per year, based on standard test results)</b>	kWh	293	/
<b>Energy consumption (per year, based on standard test results) - average</b>	kWh	/	1330
<b>Energy consumption (per year, based on standard test results) - warmer</b>	kWh	/	1373
<b>Dehumidifying</b>	Kg/h	1,5	
<b>Degree of protection (IN) / (OUT)</b>	(IP)	IPX0/IPX4	
<b>Class of electric protection (IN) / (OUT)</b>	Class I / Class II	I/I	
<b>Max. input consumption</b>	W	2550	
<b>Max. current</b>	A	13	
<b>Compressor</b>	Model		
	Type	Rotary	
	Brand	SANYO	
<b>Indoor</b>	Indoor Air Circulation	m <sup>3</sup> /h	820
	Indoor Noise Level dB	dB(A)	54/50/47/43/36
	Net Dimension	mm	920×306×195
	Packing Dimension	mm	990×380×265
	Net Weight / Gross Weight	Kg	11/13
<b>Outdoor</b>	Outdoor Noise Level dB	dB(A)	55
	Net Dimension	mm	853×602×349
	Packing Dimension	mm	890×628×385
	Net Weight / Gross Weight	Kg	35/38
	Refrigerant Type		R32
	Refrigerant Weight	Kg	1
	GWP		675
	tCO <sub>2</sub> eq.		0,68
<b>Max. Discharge / Max. Suction pressure</b>	Mpa	3,7/1,2	
<b>Refrigerant piping</b>	Liquid side / Gas side / Length	mm	Dg4/Dg8 (1/4-3/8)
	Max. refrigerant pipe length / Max. difference in level	m	25/10