




I FEEL

The remote control can keep track of the temperature at its current location and send the signal to the air conditioner, so it can optimize the room temperature for your maximum comfort.



HORIZONTAL SWING

You can use the horizontal swing feature to adjust the airflow direction, if you prefer the air from the AC to blow sideways.



3D AIRFLOW

Depending on the model, you can choose between different air dispersion positions available, such as blanket-style, shower-style, breeze etc.




RC HOLDER

Keep your remote control conveniently stored in its holder, so you always know where it is when you need it.



WI-FI

Wi-Fi feature means that Tesla air conditioner can also be controlled with mobile phones or other smart devices: an option that adds to your everyday convenience and comfort!

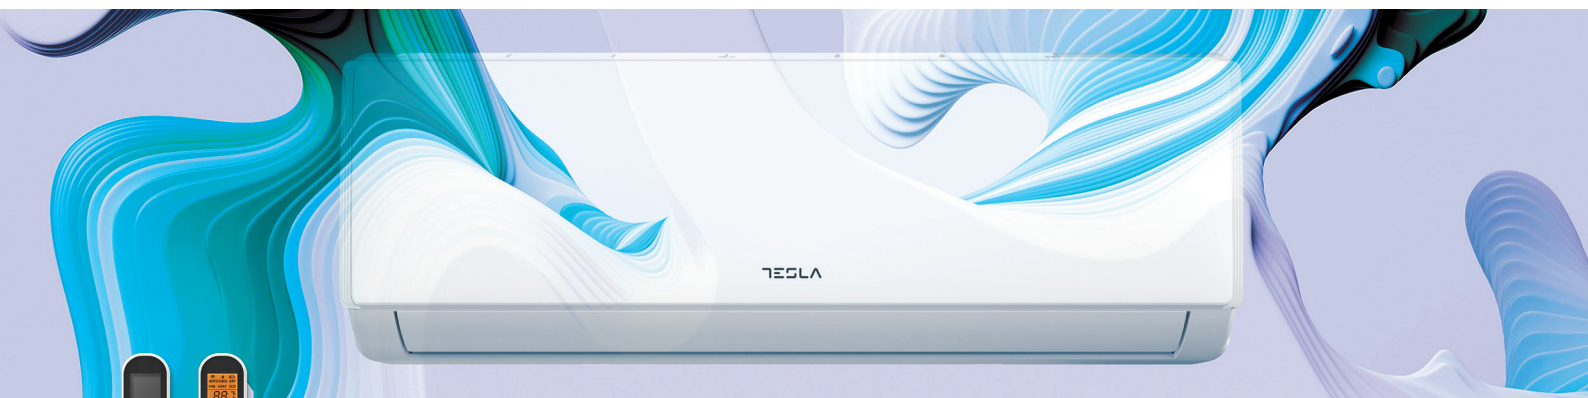

Features

I Feel / Follow me, Smart Air Flow, ECO, Super EMC performance, Self-diagnostic, Intelligent defrosting, Self-Cleaning Function, Anti-fungus Function, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Sleep Mode, Fault Code Indication, Emergency button, Auto restart, Timer Auto turn off/on, 4-Fan Speed, Five-speed outdoor fan motor, Mono & multi compatibility, 8°C heating feature, Low-Temperature Heating/Cooling, Honeycomb filter, Washable filter, Dual side Drainage, Stability Protection, 56°C sterilization, Refrigerant Leakage Detect, Remote control, Louver position memory, Hidden led display, Display ON/OFF, Comfortable Cooling, Strong Cooling at 60°C, Rapid Cooling and Rapid Heating, RC holder, Hydrophilic Aluminum Fin, Backup Switch, Multi Fan Speed Equipped, I-clean, Top plate/cover, Auto Swing Louver function, Anti-Cold Air, Mute mode, Remote with backlight, Special coating for evaporator

Capacity			18000BTU
Rated volt and frequency		V/Hz	220-240V~/50Hz/1P
Mode			Cooling
Rated capacity		W	5100(1250-5910)
Power input		W	1580(330-2340)
Current input		A	8.1(1.7~12.0)
SEER / Energy Class			6,1/A++
SCOP / Energy Class - average			/
SCOP / Energy Class - warmer			5,1/A+++
Operating range (°C)		°C	15-53
Energy consumption (per year, based on standard test results)		kWh	293
Energy consumption (per year, based on standard test results) - average		kWh	/
Energy consumption (per year, based on standard test results) - warmer		kWh	1330
Dehumidifying		Kg/h	1,5
Degree of protection (IN) / (OUT)		(IP)	IPX0/IPX4
Class of electric protection (IN) / (OUT)		Class I / Class II	I/I
Max. input consumption		W	2520
Max. current		A	13
Compressor	Model		
	Type		Rotary
	Brand		GMCC
Indoor	Indoor Air Circulation	m³/h	800
	Indoor Noise Level dB	dB(A)	53/50/47/43/36
	Net Dimension	mm	910×294×206
	Packing Dimension	mm	979×372×277
	Net Weight / Gross Weight	Kg	10/13
Outdoor	Outdoor Noise Level dB	dB(A)	55
	Net Dimension	mm	853×602×349
	Packing Dimension	mm	890×628×385
	Net Weight / Gross Weight	Kg	35/38
	Refrigerant Type		R32
	Refrigerant Weight	g	1
	GWP		675
	tCO ₂ eq.		0,68
	Max. Discharge / Max. Suction pressure	Mpa	3,7/1,2
Refrigerant piping	Liquid side / Gas side / Length	mm	Dg4/Dg8 (1/4-3/8)
	Max. refrigerant pipe length / Max. difference in level	m	25/10