
### **Tesla Ambient**

# JESLA



#### **3 IN 1 FILTER**

With a filter that combines polyphenols, anion and vitamin C, this Tesla AC model can help you reduce the amount of dust, allergens, and harmful microorganisms in the air.

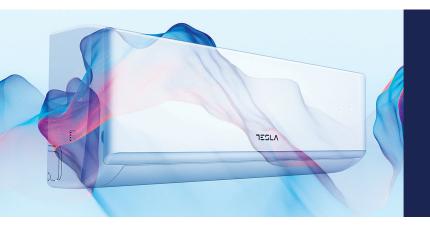


#### REMOTE CONTROL WITH BACKLIGHT

The LCD backlight makes the buttons on the remote light up each time you press them: a feature quite useful if you want to double-check if you have correctly entered a command.



#### SUPER MUTE MODE

The super mute option is a helpful feature that significantly reduces the noise the unit makes. This can be especially beneficial in areas where sound levels must remain low, such as bedrooms or offices.



**3D AIRFLOW** 

Depending on the model, you can choose between different air dispersion positions available, such as blanket-style, showerstyle, breeze etc.



#### HORIZONTAL SWING

You can use the horizontal swing feature to adjust the airflow direction, if you prefer the air from the AC to blow sideways.



#### WI-FI

Wi-Fi feature means that Tesla air conditioner can also be controlled with mobile phones or other smart devices: an option that adds to your everyday convenience and comfort!

#### 1 | tesla.info

# JESLA

1ESL

## R32 Inverter Split Type Model **TT68EXC1-2432IAW**



### Features

I Feel / Follow me, Smart Air Flow, ECO, Super EMC performance, Self-diagnostic, Intelligent defrosting, Self-Cleaning Function, Anti-fungus Function, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Auto mode, Sleep Mode, Fault Code Indication, Emergency button, Auto restart, Timer Auto turn off/on, 4-Fan Speed, Five speed outdoor fan motor, Mono & multi compatibility, 8°C heating feature, Low Temperature Heating/Cooling, Honeycomb filter, Washable filter, High density filter, Dual side Drainage, Stability Protection, 3D Air Flow, 56°C sterilization, Refrigerant Leakage Detect, Remote control, Louver position memory, Horizontal louver auto swing, Hidden led display, Display ON/OFF, Comfortable Cooling, Strong Cooling at 60°C, Rapid Cooling and Rapid Heating, Horizontal swing, RC holder, Additional Health filter, Hydrophilic Aluminum Fin, Backup Switch, Multi Fan Speed Equipped, I-clean, Top plate/cover, Auto Swing Louver function, Anti-Cold Air, Wi Fi, Super mute mode, 3D Air flow, Remote with backlight, Spetial coating for evaporator, 3in1 Filter

Capacity				24000BTU	
Rated volt and frequency			V/Hz	220-240V~/50Hz/1P	
Mode			Cooling	Heating	
Rated capacity		W	6810(1830~7800)	6870(1850~7900)	
Power input		W	2257(410~2824)	2063(420~3005)	
Current input		A	10.7(2.3~12.3)	9.9(2.3~13.5)	
SEER / Energy Class			6,1/A++	/	
SCOP / Energy Class - average			/	4.0/A+	
SCOP / Energy Class - warmer			/	5,1/A+++	
Operating range (°C)		°C	15-53	-20-30	
Energy consumption (per year, based on standard test results)		kWh	390	/	
Energy consumption (per year, based on standard test results) - average		kWh	/	1680	
Energy consumption (per year, based on standard test results) - warmer		kWh	/	1592	
Dehumidifying		Kg/h	1,8		
Degree of protection (IN) / (OUT)		(IP)	IPX0/IPX4		
Class of electric protection (IN) / (OUT)		Class I / Class II	١/١		
Max. input consumption		W	3005		
Max. current		A	13,5		
	Model				
Compressor T		Туре		Rotary	
	Brand		SANYO		
	Indoor Air Circulation		m³/h	980	
5	Indoor Noise Level dB		dB(A)	54/51/48/44/40	
	Net Dimension		mm	1010×315×220	
5	Packing Dimensic	n	mm	1096×390×297	
	Net Weight / Gross Weight		Kg	13/16	
	Outdoor Noise Level dB		dB(A)	57	
	Net Dimension		mm	920×699×380	
	Packing Dimension		mm	960×732×400	
p V	Net Weight / Gross Weight		Kg	40/43	
Jutgoor	Refrigerant Type			R32	
5	Refrigerant Weight		g	1,14	
Ī	GWP			675	
Ī	tCO <sub>2</sub> eq.			0,77	
Ì	Max. Discharge / Max. Suction pressure		Мра	3,7/1,2	
Liquid side / Gas side / Length   Refrigerant piping Max. refrigerant pipe length / Max. difference in level		mm	Dg4/Dg8 (1/4-1/2)		
			m	25/10	